




RDC40 : Compatible with multi-rotational position tracking.

RDC50 : Compact, high precision, high heat resistant rotary sensors, meet various needs in position detection.

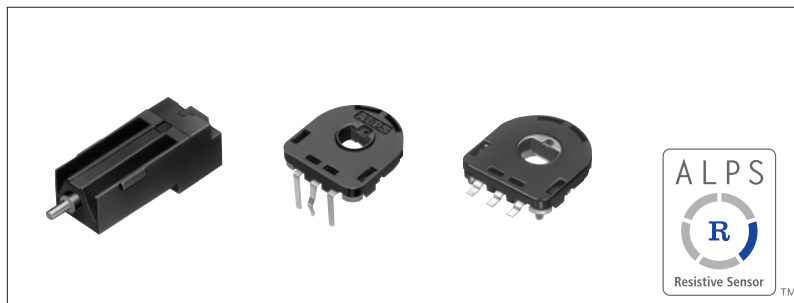

Magnetic Sensors

Piezo Sensors

Resistive Sensors

Typical Specifications


Items	Specifications	
	RDC40	RDC50
Operating life	100,000cycles	1,000,000cycles
Total resistance	10kΩ	
Operating temperature range	-30°C to +80°C	-40°C to +120°C

Product List

Mounting method	Effective variable range	Linearity	Hollow shaft variation	Operating life (cycles)	Minimum packing unit (pcs.)※	Model No.	Drawing No.
Connector type	13rotations	±1%	—	100,000	770	RDC401D07A	1
Horizontal type	320°	±2%	φ 3.5 dia	1,000,000	1,500	RDC501015A	2
			φ 3.5 dia with radius			RDC501011A	3
Vertical type			φ 3.5 dia		1,600	RDC502010A	4
Reflow type			φ 3.5 dia with radius		1,300	RDC503013A	5
			φ 3.5 dia with radius			RDC503015A	6
Reflow type(Low-profile)			φ 4 dia		1,200	RDC506002A	7

Packing Specifications

Tray/Taping Unit:mm

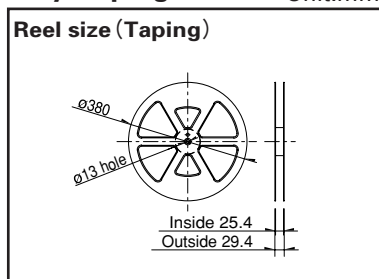

Series	Packing Specifications	Number of packages (pcs.)		Tape width (mm)	Export package measurements (mm)
		1 case /Japan	1 case /export packing		
RDC40	Tray	770	880	—	370×525×234
RDC501		1,500	3,000		526×370×191
RDC502		1,600	1,600		370×280×92
RDC503	Taping	3,900	3,900	24	407×415×135
RDC506		3,600	3,600		

Notes

1. Additional product specifications in response to those not included in the above recommended products are also available.
2. Please place purchase orders per minimum order unit N (integer).

Refer to **P.526** for product specifications.
Refer to **P.527** for soldering conditions.


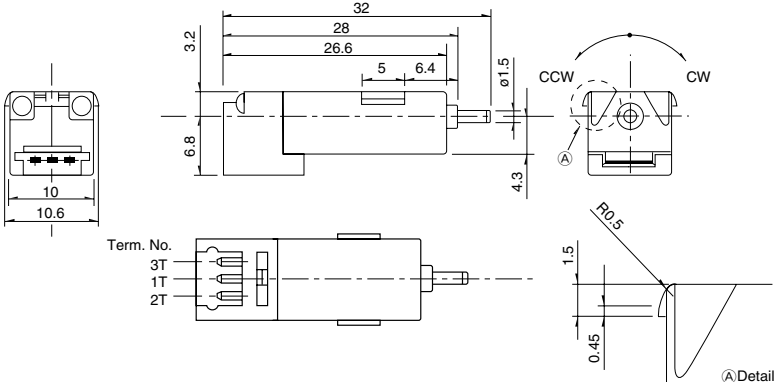

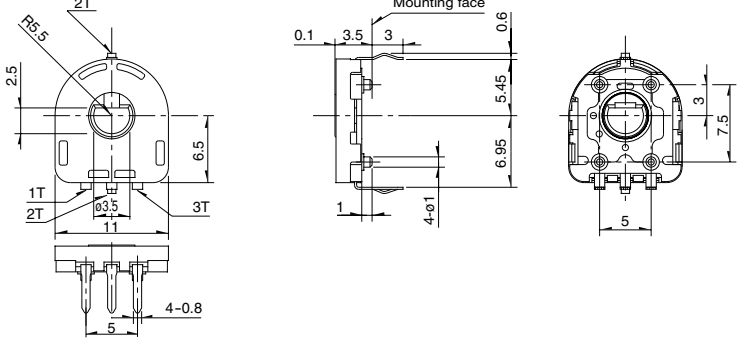

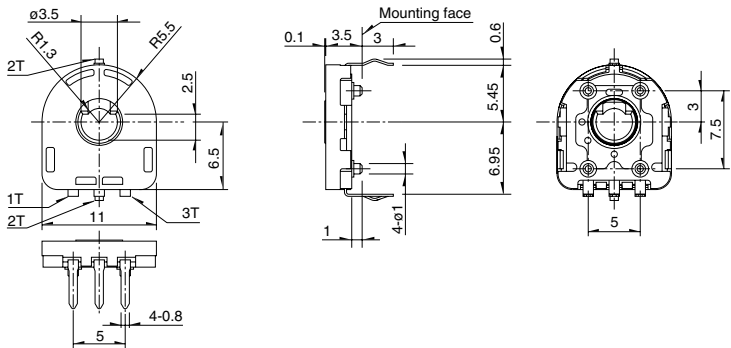

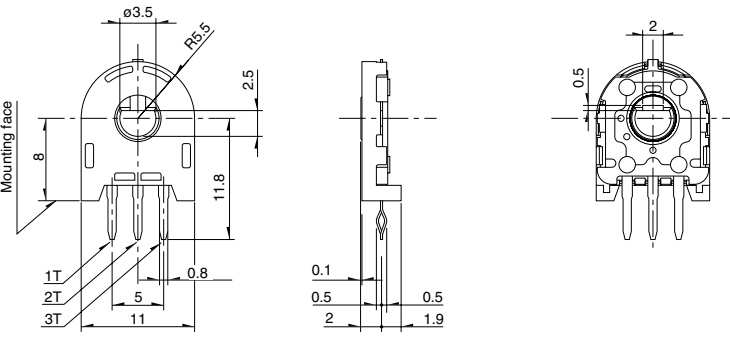


Automotive Use

Dimensions

Unit:mm


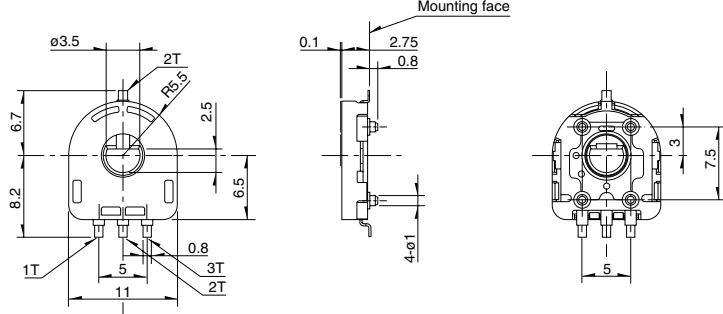

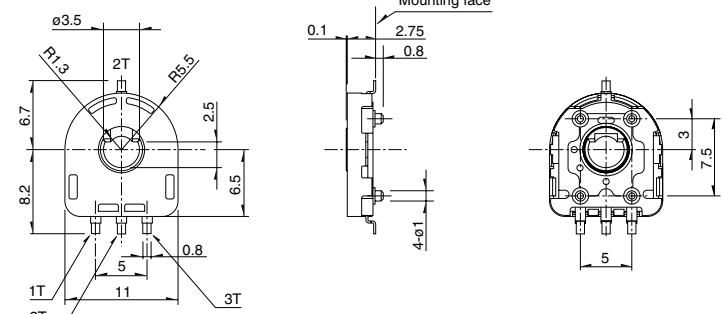

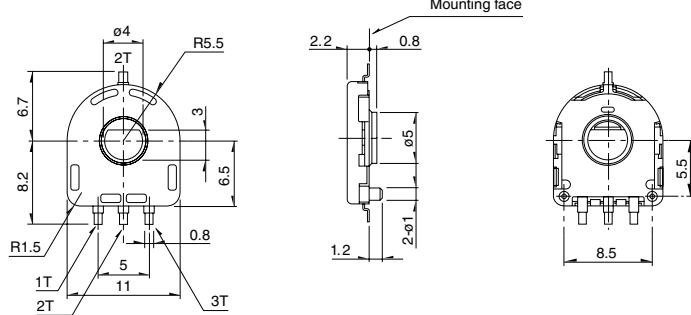
Magnetic Sensors
 Piezo Sensors
 Resistive Sensors

No.	Photo	Style
1	RDC40 (Multiple turns type) 	
2	RDC501 (Horizontal type) 	
3	RDC501 (Horizontal type, φ3.5 dia with radius) 	
4	RDC502 (Vertical type) 	


 Automotive Use

Dimensions

Unit:mm


No.	Photo	Style
5		
6		
7		

Magnetic Sensors

Piezo Sensors



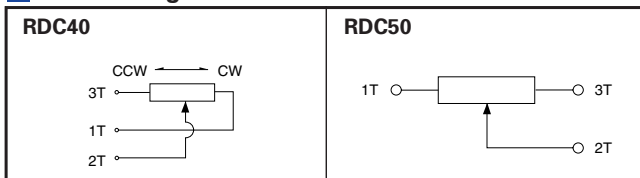



Resistive Sensors

Circuit Diagram



Automotive Use

Index for Functions

Type		Rotary Type			Linear Type		
Series	RDC40	RDC50	RDC80	RDC10	※RD7		
Photo							
Travel (mm)	_____			14mm (RDC1014) 22mm (RDC1022) 32mm (RDC1032) 47mm (RDC1047)	8mm (RD708) 9mm (RD709) 12mm (RD712)		
Mounting method	_____				Vertical	Horizontal	
Effective variable angle (°)	4680 (13 rotations)	320	330 (1-phase) 360 (2-phase)	_____			
Soldering	Manual soldering	_____					350°C max. 3s max.
	Dip soldering	_____	260°C, 4±1s	_____		260°C, 4±1s	
	Re-flow soldering	_____	Please see P.527			_____	
Operating temperature range	-30°C to +80°C	-40°C to +120°C		-30°C to +85°C	-40°C to +105°C		
Mechanical performance	Operating force	_____			0.25N max.	2N less	
	Rotational torque	2mN·m max.		10mN·m max.	_____		
Electrical performance	Total resistance tolerance	±30%				±20%	
	Linearity (%)	±1	±2	±3	±0.5	±1	
	Rated Voltage (VDC)	5				12	
Environmental test	Long-term heat resistance	-30±3°C for 240h	-40±3°C for 168h		-40±3°C for 240h	-40±3°C for 96h	
	Moisture resistance	+80±2°C for 240h	+120±3°C for 168h		+90±2°C for 240h	+105±2°C for 96h	
	Cold	+60±2°C, 90~95%RH for 240h	+60±2°C, 90~95%RH for 96h		+60±2°C, 90~95%RH for 240h	+40±2°C, 90~95%RH for 96h	
Page	518		521	522	524		

- Resistive Sensors Product Specifications526
- Resistive Sensors Soldering Conditions527
- Resistive Sensors Measurement and Test Methods527
- Resistive Sensors Caution528





Note

※The RD7 series are used to detect vehicle headlight angles.

Product Specifications

Method for Regulating the Linearity


Magnetic Sensors
Piezo Sensors
Resistive Sensors

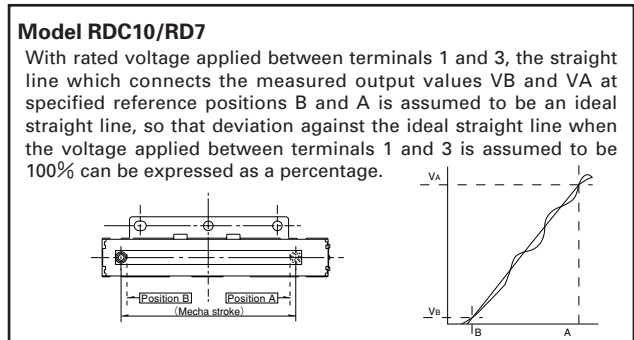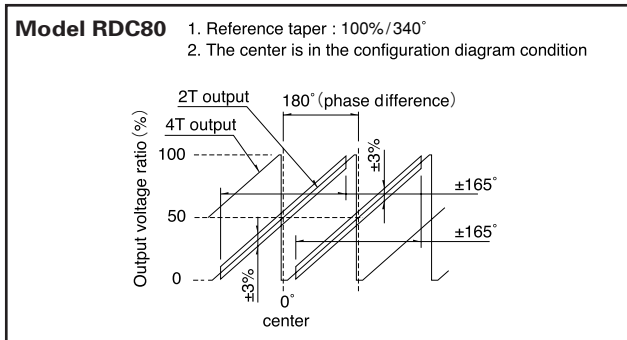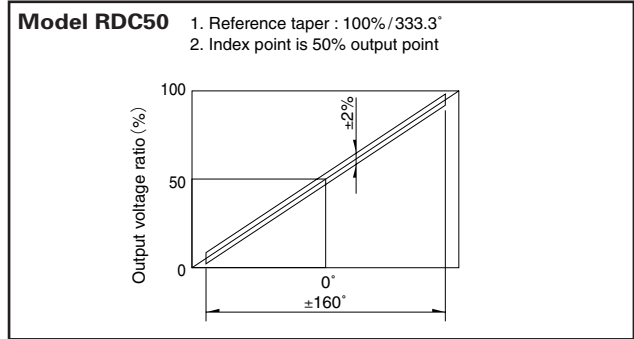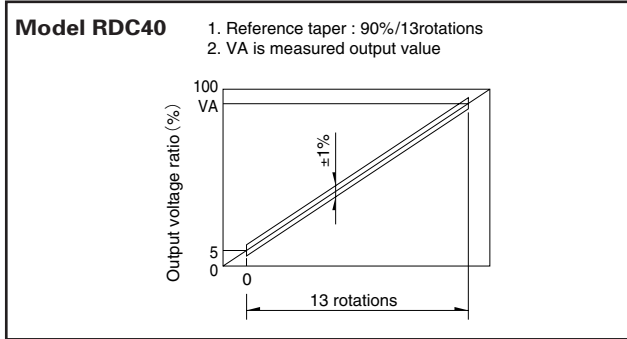

Soldering Conditions

Soldering Conditions

1. Recommended reflow conditions

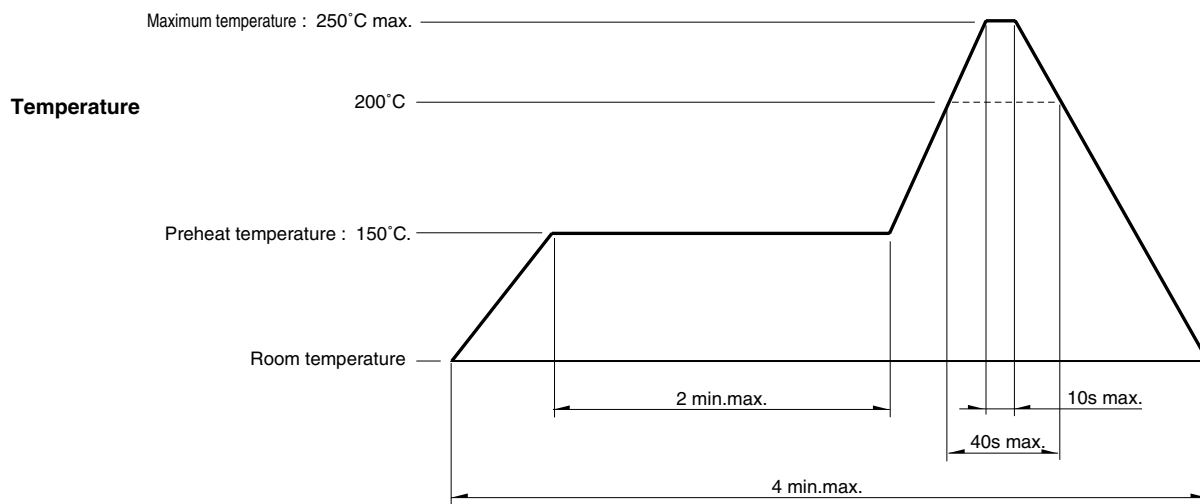

2. Cleaning Cleaning should not be attempted.
3. Type of solder to be used Use cream solder that contains 10 - 15 %wt flux.
4. Number of solder applications - apply solder only once

Notes

1. When using an infrared reflow oven, solder may not always be applied as intended. Be sure to use a hot air reflow oven or a type that uses infrared rays in combination with hot air.
2. The temperatures given above are the maximum temperatures at the terminals of the potentiometer when employing a hot air reflow method. The temperature of the PC board and the surface temperature of the potentiometer may vary greatly depending on the PC board material, its size and thickness. Ensure that the surface temperature of the potentiometer does not rise to 250°C or greater.
3. Conditions vary to some extent depending on the type of reflow bath used. Be sure to give due consideration to this prior to use.

Measurement and Test Methods

Analog Output Contact Type Sensor

[Total Resistance]

The total resistance, with the shaft (lever) placed at the end of terminal 1 or 3, shall be determined by measuring the resistance between the resistor terminals 1 and 3 unless otherwise specified.

[Rating Voltage]

The rating voltage corresponding to the rated power shall be determined by the following equation. When the resulting rated voltage exceeds the maximum operating voltage of a specific resistor, the maximum operating voltage shall be taken as the rated voltage.

$E = \sqrt{P \cdot R}$
E : Rated voltage (V)
P : Rated power (W)
R : Total nominal resistance (Ω)