

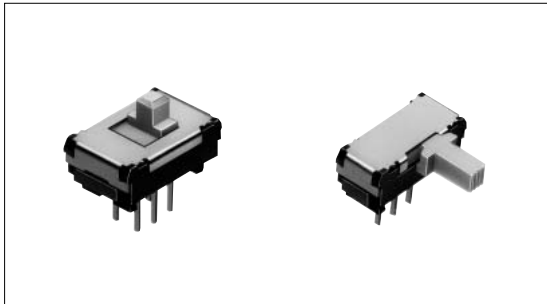
# Slide Switch 5(H)mm, 2mm-travel Type

SSSS9 Series



Mid-size general purpose type well established for it's user friendliness.

- Detector
- Push
- Slide
- Rotary
- Encoders
- Power
- Dual-in-line Package Type
- TACT Switch™



## Typical Specifications

Items		Specifications	
Rating( max. )/( min. ) ( Resistive load )		0.1A 12V DC/50μA 3V DC	
Contact resistance ( Initial performance/After lifetime )		30m max./80m max.	
Operating force		2-positions	3-positions
		3 ± 1.5N	a, c b 2 ± 1N b a, c 3 ± 1.5N
Operating life	Without load	10,000cycles	
	With load	10,000cycles( 0.1A 12V DC )	

## Product Line

Travel (mm)	Actuator direction	Actuator length(mm)	Poles	Positions	Mounting method	Changeover timing	Soldering	Minimum order unit(pcs.)	Products No.	Drawing No.		
2	Vertical	2	1	2	Standard	Non shorting	Manual, Dip	5.000	SSSS912000	1		
					Snap-in( t1.6 )				SSSS910400	2		
				3	Standard	Not specified			SSSS919500	3		
			Snap-in( t1.6 )		SSSS918500				4			
			2	2	Standard	Non shorting			4.000	SSSS922000	5	
					Standard	Not specified				SSSS921800	6	
		4	1	2	Standard	Non shorting		5.000	SSSS912500	1		
					Snap-in( t1.6 )	Not specified			SSSS910800	2		
				3	Standard	Not specified			SSSS919800	3		
			Snap-in( t1.6 )		SSSS918700				4			
			2	2	Standard	Non shorting			4.000	SSSS922500	5	
					Standard	Not specified				SSSS923200	6	
	Horizontal	2	1	2	Standard	Non shorting	5.000	5.000	SSSS916900	8		
					Snap-in( t1.6 )				Not specified	SSSS915000	9	
				3	Standard	Not specified			SSSS91B900	10		
			Snap-in( t1.6 )		SSSS926400				12			
			2	2	Standard	Non shorting			4.000	SSSS928500	14	
					Standard	Not specified				SSSS916400	8	
		4	1	2	Standard	Non shorting	5.000	5.000	SSSS914500	9		
					Snap-in( t1.6 )	Not specified			SSSS91B600	10		
				3	Standard	Not specified			SSSS91A600	11		
			Snap-in( t1.6 )		SSSS925800				12			
			2	2	Standard	Non shorting			4.000	4.000	SSSS923800	13
					Standard	Not specified					SSSS928200	14
3	3	Standard	Not specified	SSSS925700	15							
		Snap-in( t1.6 )										

## Notes

1. Products other than those listed in the above chart are also available. Please contact us for details.
2. Please contact us for automotive use products.
3. Please place purchase orders per minimum order unit(integer).

**Dimensions**

Vertical Actuator Type

Unit:mm

No.	Style	PC board mounting hole dimensions (Viewed from the direction A)
1	<p><b>1-pole, 2-positions Standard type</b></p>	
2	<p><b>1-pole, 2-positions Snap-in type</b></p>	
3	<p><b>1-pole, 3-positions Standard type</b></p>	
4	<p><b>1-pole, 3-positions Snap-in type</b></p>	

Detector

Push

**Slide**

Rotary

Encoders

Power

Dual-in-line  
Package Type

TACT Switch™

Custom-  
Products

Small size  
General Use type

Big size  
General Use type

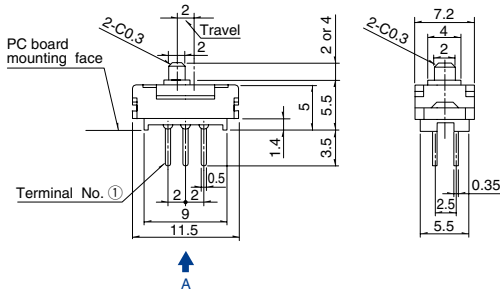

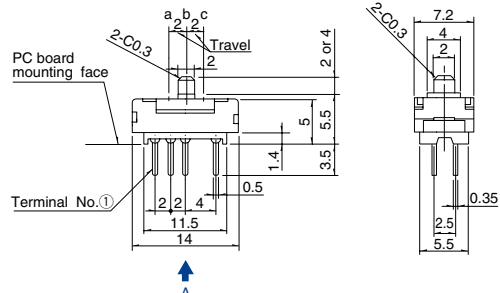

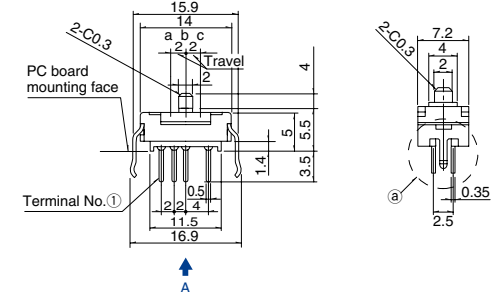
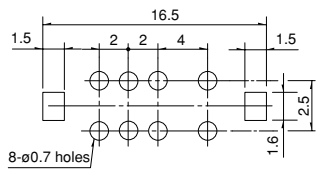
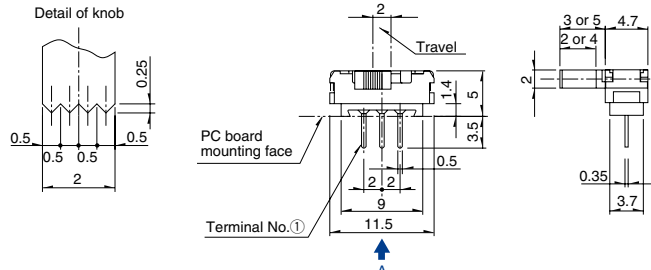

Other Use type

# Slide Switch 5(H)mm, 2mm-travel Type | SSSS9 Series

## Dimensions

Vertical Actuator Type

Unit:mm

No.	Style	PC board mounting hole dimensions ( Viewed from the direction A )
5	<p><b>2-poles, 2-positions Standard type</b></p> 	 <p>6-<math>\phi</math>0.7 holes</p>
6	<p><b>2-poles, 3-positions Standard type</b></p> 	 <p>8-<math>\phi</math>0.7 holes</p>
7	<p><b>2-poles, 3-positions Snap-in type</b></p> 	 <p>8-<math>\phi</math>0.7 holes</p>
8	<p><b>1-pole, 2-positions Standard type</b></p> 	 <p>3-<math>\phi</math>0.7 holes</p>

**Dimensions**

Horizontal Actuator Type

Unit:mm

No.	Style	PC board mounting hole dimensions (Viewed from the direction A)
9	<p><b>1-pole, 2-positions Snap-in type</b></p>	
10	<p><b>1-pole, 3-positions Standard type</b></p>	
11	<p><b>1-pole, 3-positions Snap-in type</b></p>	
12	<p><b>2-poles, 2-positions Standard type</b></p>	

Detector

Push

**Slide**

Rotary

Encoders

Power

Dual-in-line  
Package Type

TACT Switch™

Custom-  
Products

Small size  
General Use type

Big size  
General Use type

Other Use type

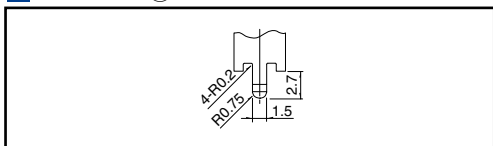
**Dimensions**

Horizontal Actuator Type

Unit:mm

No.	Style	PC board mounting hole dimensions ( Viewed from the direction A )
13	<b>2-poles, 2-positions Snap-in type</b> 	
14	<b>2-poles, 3-positions Standard type</b> 	
15	<b>2-poles, 3-positions Snap-in type</b> 	















**Detail of (a)** Unit:mm



**Circuit Diagram ( Viewed from Direction A )**

<b>1-pole, 2-positions Standard type</b> 	<b>1-pole, 2-positions Snap-in type</b> 	<b>1-pole, 3-positions Standard type</b> 	<b>1-pole, 3-positions Snap-in type</b> 
<b>2-poles, 2-positions Standard type</b> 	<b>2-poles, 2-positions Snap-in type</b> 	<b>2-poles, 3-positions Standard type</b> 	<b>2-poles, 3-positions Snap-in type</b> 

# List of Varieties

Series		SSAG	SSAH	SSAD	SSSS8	SSSS7	SSSS2	SSSS9	SSSF	SSSU	SSSB	SSST	SSAA	SSAC	SSAB		
Photo																	
Outline specifications	Travel (mm)	1.5			1.5 2		2		3		4		2	1.5	1.9 2		
	Actuator direction	Horizontal			Vertical Horizontal	Horizontal	Vertical Horizontal			Vertical		Horizontal		Vertical Horizontal			
	Number of poles	1			1 2		1 2 4		2 4	1	1 2	2	1				
Dimensions (mm)	W	9.05	9.5	6.7	11.2	8.8	13	14	16.5	24.5	29	13	12.4	9.5	9		
	D	3		3.2	2.6	3	3.5	4.7	7		9	4.3	6	5.5	4.2		
	H	1.15	0.9	0.7	1.4	2		5	8.5		12	3.5	5	5.2	8.5		
Operating temperature range		-10 to +60			-40 to +85		-10 to +60										
Rating (max. )( min. ) (Resistive load)		10mA 5V DC	1mA 5V DC		0.3A 4V DC		0.3A 6V DC	0.1A 12V DC	0.1A 30V DC		0.3A 30V DC	0.1A 12V DC	0.1A 30V DC	1mA 5V DC	0.1A 12V DC		
Electrical performance		Initial contact resistance		200m max.	100m max.	70m max.		30m max.	25m max.		20m max.	70m max.	25m max.	100m max.	30m max.		
		Insulation resistance				100M min. 100V DC				100M min. 500V DC				100M min. 100V DC	100M min. 500V DC		
		Voltage proof				100V AC for 1minute				500V AC for 1minute				100V AC for 1minute	500V AC for 1minute		
Mechanical performance		Robustness of terminal				3N for 1minute				5N for 1minute		3N for 1minute	5N for 1minute				
		Robustness of actuator		Operating direction		10N		5N	10N	20N	30N		50N	20N	10N	5N	30N
		Pulling direction		10N		10N Static force		10N	30N Static force		10N	10N	10N	10N	10N	10N	40N
Durability		Operating life without load		10,000cycles	10,000cycles	10,000cycles 100m max. 2		10,000cycles 60m max.	10,000cycles 45m max.		10,000cycles 40m max.	10,000cycles 100m max.	10,000cycles 45m max.	10,000cycles 200m max.	1,000cycles 60m max.		
		Operating life without load Load as rating		500m max.	300m max.	10,000cycles 200m max.	10,000cycles 130m max. 2	10,000cycles 80m max.	10,000cycles 65m max.		5,000cycles 60m max.	10,000cycles 130m max.	10,000cycles 65m max.	200m max.	10,000cycles 80m max.		
Environmental performance		Cold		-40 ± 2 for 96h		-20 ± 2 for 96h											
		Dry heat		85 ± 2 for 96h													
		Damp heat		40 ± 2 , 90 to 95%RH for 96h													
Soldering		Manual soldering		350 ± 5 3s max.	300 ± 5 5s max.	260 ± 5 3s max.	350 ± 10 4s max.	300 ± 10 5s max.	350 ± 10 5s max.	350 ± 10 3 ± 1s		350 ± 10 3s max.	300 ± 10 3 ± 1s	300 ± 10 2s	350 ± 10 3 ± 1s		
		Dip soldering					260 ± 5 3 ± 1s	260 ± 5 5 ± 1s	260 ± 5 10 ± 1s		260 ± 5 5 ± 1s	260 ± 10 10 ± 1s	260 ± 10 5 ± 1s	260 ± 5 10 ± 1s			
		Reflow soldering		Please see P.154													
Poles-positions		1-2	—	—													
		1-3			—										—		
		1-4	—				—				—						
		2-2	—				—								—		
		2-3	—				—								—		
		2-4	—				—				—						
		4-2	—				—				—						
Page		112	115	117	119	123	126	130	135	139	143	146	147	150	152		

Slide Switches Soldering Conditions ..... 154  
 Slide Switches Cautions ..... 155

- Detector
- Push
- Slide**
- Rotary
- Encoders
- Power
- Dual-in-line Package Type
- TACT Switch™
- Custom-Products

- Small size General Use type
- Big size General Use type
- Other Use type

**Note**

The operating temperature range for automotive applications can be raised upon request. Please contact us for requirements of this kind.